
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION



REAR ELEVATION (CAR PARK, NW)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

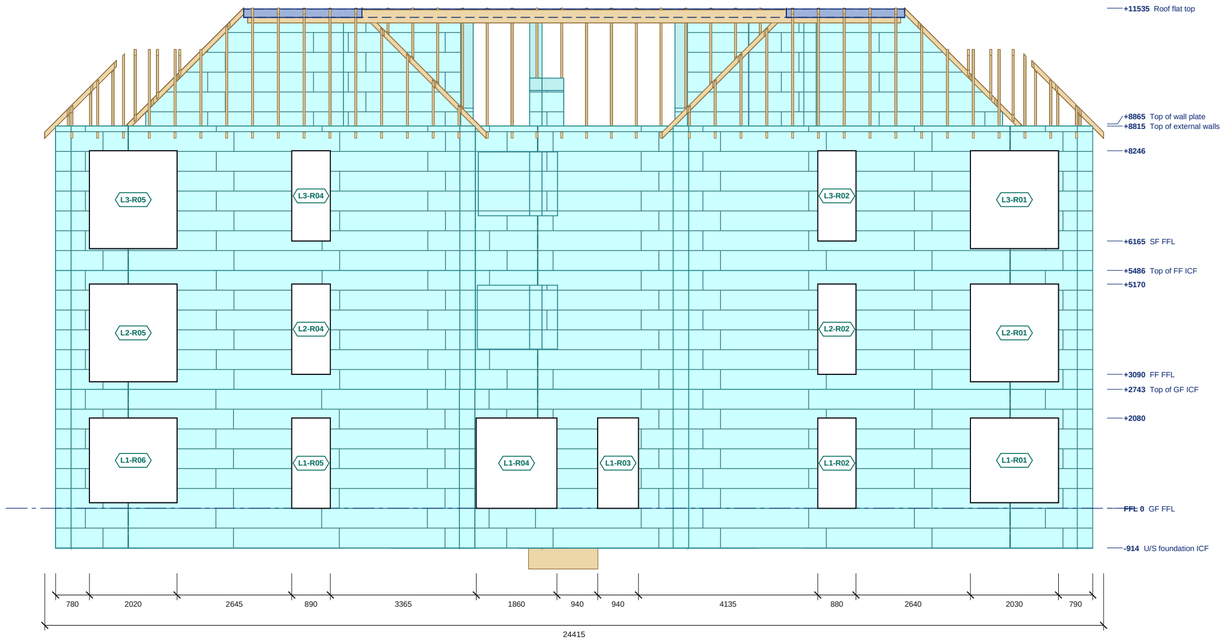

FRONT ELEVATION (MAYFIELD, SE)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5m

ELEVATION SCHEDULES

REAR ELEVATION (CAR PARK, NW): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-R01	2030	1950	+130	+2080	-
L1-R02	880	2080	0	+2080	-
L1-R05	890	2080	0	+2080	-
L1-R06	2020	1950	+130	+2080	-
L1-R03	940	2084	0	+2084	-
L1-R04	1860	2080	0	+2080	-
L2-R01	2030	2250	+2920	+5170	-
L2-R02	880	2080	+3090	+5170	-
L2-R04	890	2080	+3090	+5170	-
L2-R05	2020	2250	+2920	+5170	-
L3-R01	2030	2255	+5990	+8245	-
L3-R02	880	2080	+6165	+8245	-
L3-R04	890	2080	+6165	+8245	-
L3-R05	2020	2255	+5990	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT ELEVATION (MAYFIELD, SE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-F15	2020	1950	+130	+2080	-
L1-F16	900	2080	0	+2080	-
L1-F18	880	2080	0	+2080	-
L1-F19	2030	1950	+130	+2080	-
L1-F17	2910	2414	0	+2414	-
L2-F14	2020	2250	+2920	+5170	-
L2-F15	900	2080	+3090	+5170	-
L2-F17	880	2080	+3090	+5170	-
L2-F18	2030	2250	+2920	+5170	-
L2-F16	2910	2396	+3090	+5486	-
L3-F14	2020	2255	+5990	+8245	-
L3-F15	900	2080	+6165	+8245	-
L3-F17	880	2080	+6165	+8245	-
L3-F18	2030	2255	+5990	+8245	-
L3-F16	2880	2024	+6165	+8189	-

Structural openings in the ICF; sill and head above GF FFL.

REAR ELEVATION (CAR PARK, NW): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

FRONT ELEVATION (MAYFIELD, SE): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
top of ICF	+2414
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8189
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-071-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 1 (12 FLATS) - FRONT AND REAR ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-EL-01	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.