

SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

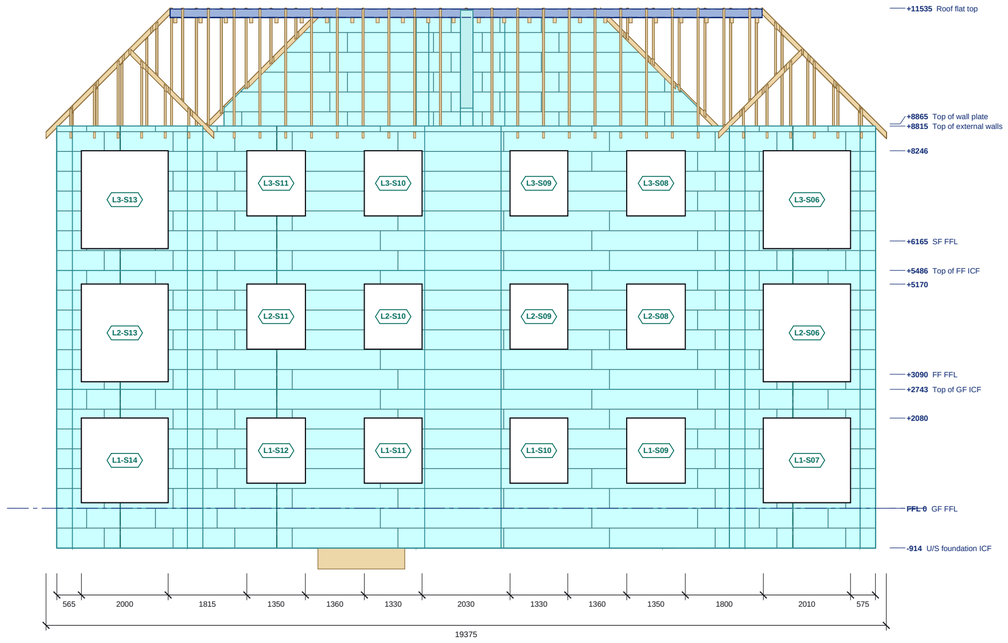

SIDE ELEVATION (GARDEN, NE)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

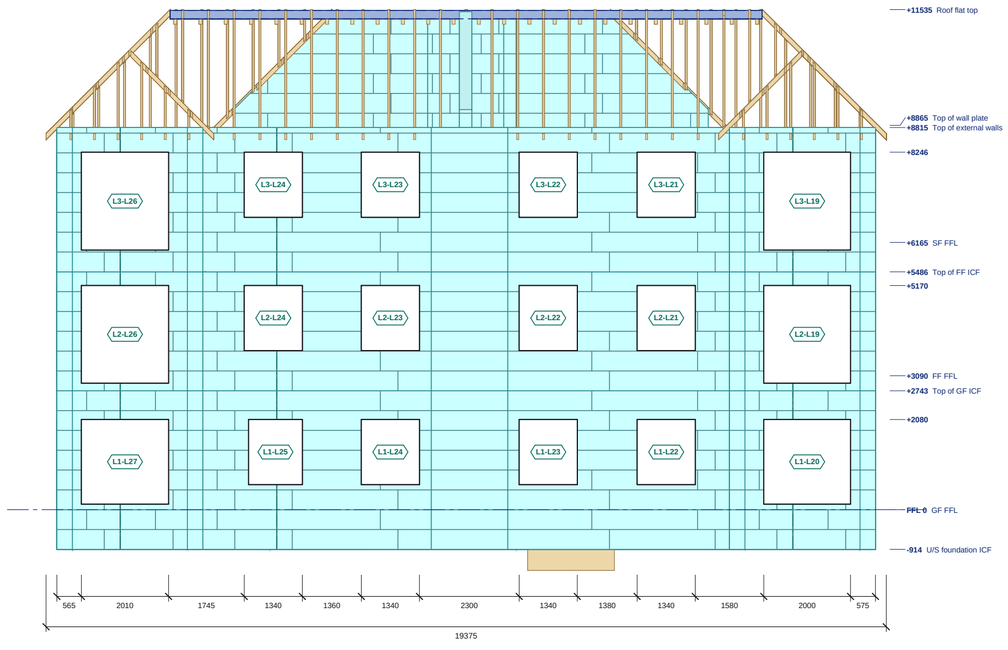

SIDE ELEVATION (QUEENS PIER ROAD, SW)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5m

ELEVATION SCHEDULES

SIDE ELEVATION (GARDEN, NE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-S07	2010	1950	+130	+2080	-
L1-S14	2000	1950	+130	+2080	-
L1-S09	1350	1500	+580	+2080	-
L1-S10	1330	1500	+580	+2080	-
L1-S11	1330	1500	+580	+2080	-
L1-S12	1350	1500	+580	+2080	-
L2-S06	2010	2250	+2920	+5170	-
L2-S13	2000	2250	+2920	+5170	-
L2-S08	1350	1500	+3670	+5170	-
L2-S09	1330	1500	+3670	+5170	-
L2-S10	1330	1500	+3670	+5170	-
L2-S11	1350	1500	+3670	+5170	-
L3-S06	2010	2255	+5990	+8245	-
L3-S13	2000	2255	+5990	+8245	-
L3-S08	1350	1500	+6745	+8245	-
L3-S09	1330	1500	+6745	+8245	-
L3-S10	1330	1500	+6745	+8245	-
L3-S11	1350	1500	+6745	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

SIDE ELEVATION (QUEENS PIER ROAD, SW): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-L20	2000	1950	+130	+2080	-
L1-L27	2010	1950	+130	+2080	-
L1-L22	1340	1500	+580	+2080	-
L1-L23	1340	1500	+580	+2080	-
L1-L24	1340	1500	+580	+2080	-
L1-L25	1240	1500	+580	+2080	-
L2-L19	2000	2250	+2920	+5170	-
L2-L26	2010	2250	+2920	+5170	-
L2-L21	1340	1500	+3670	+5170	-
L2-L22	1340	1500	+3670	+5170	-
L2-L23	1340	1500	+3670	+5170	-
L2-L24	1340	1500	+3670	+5170	-
L3-L19	2000	2255	+5990	+8245	-
L3-L26	2010	2255	+5990	+8245	-
L3-L21	1340	1500	+6745	+8245	-
L3-L22	1340	1500	+6745	+8245	-
L3-L23	1340	1500	+6745	+8245	-
L3-L24	1340	1500	+6745	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

SIDE ELEVATION (GARDEN, NE): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

SIDE ELEVATION (QUEENS PIER ROAD, SW): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-071-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 1 (12 FLATS) - SIDE ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-EL-02	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.