
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

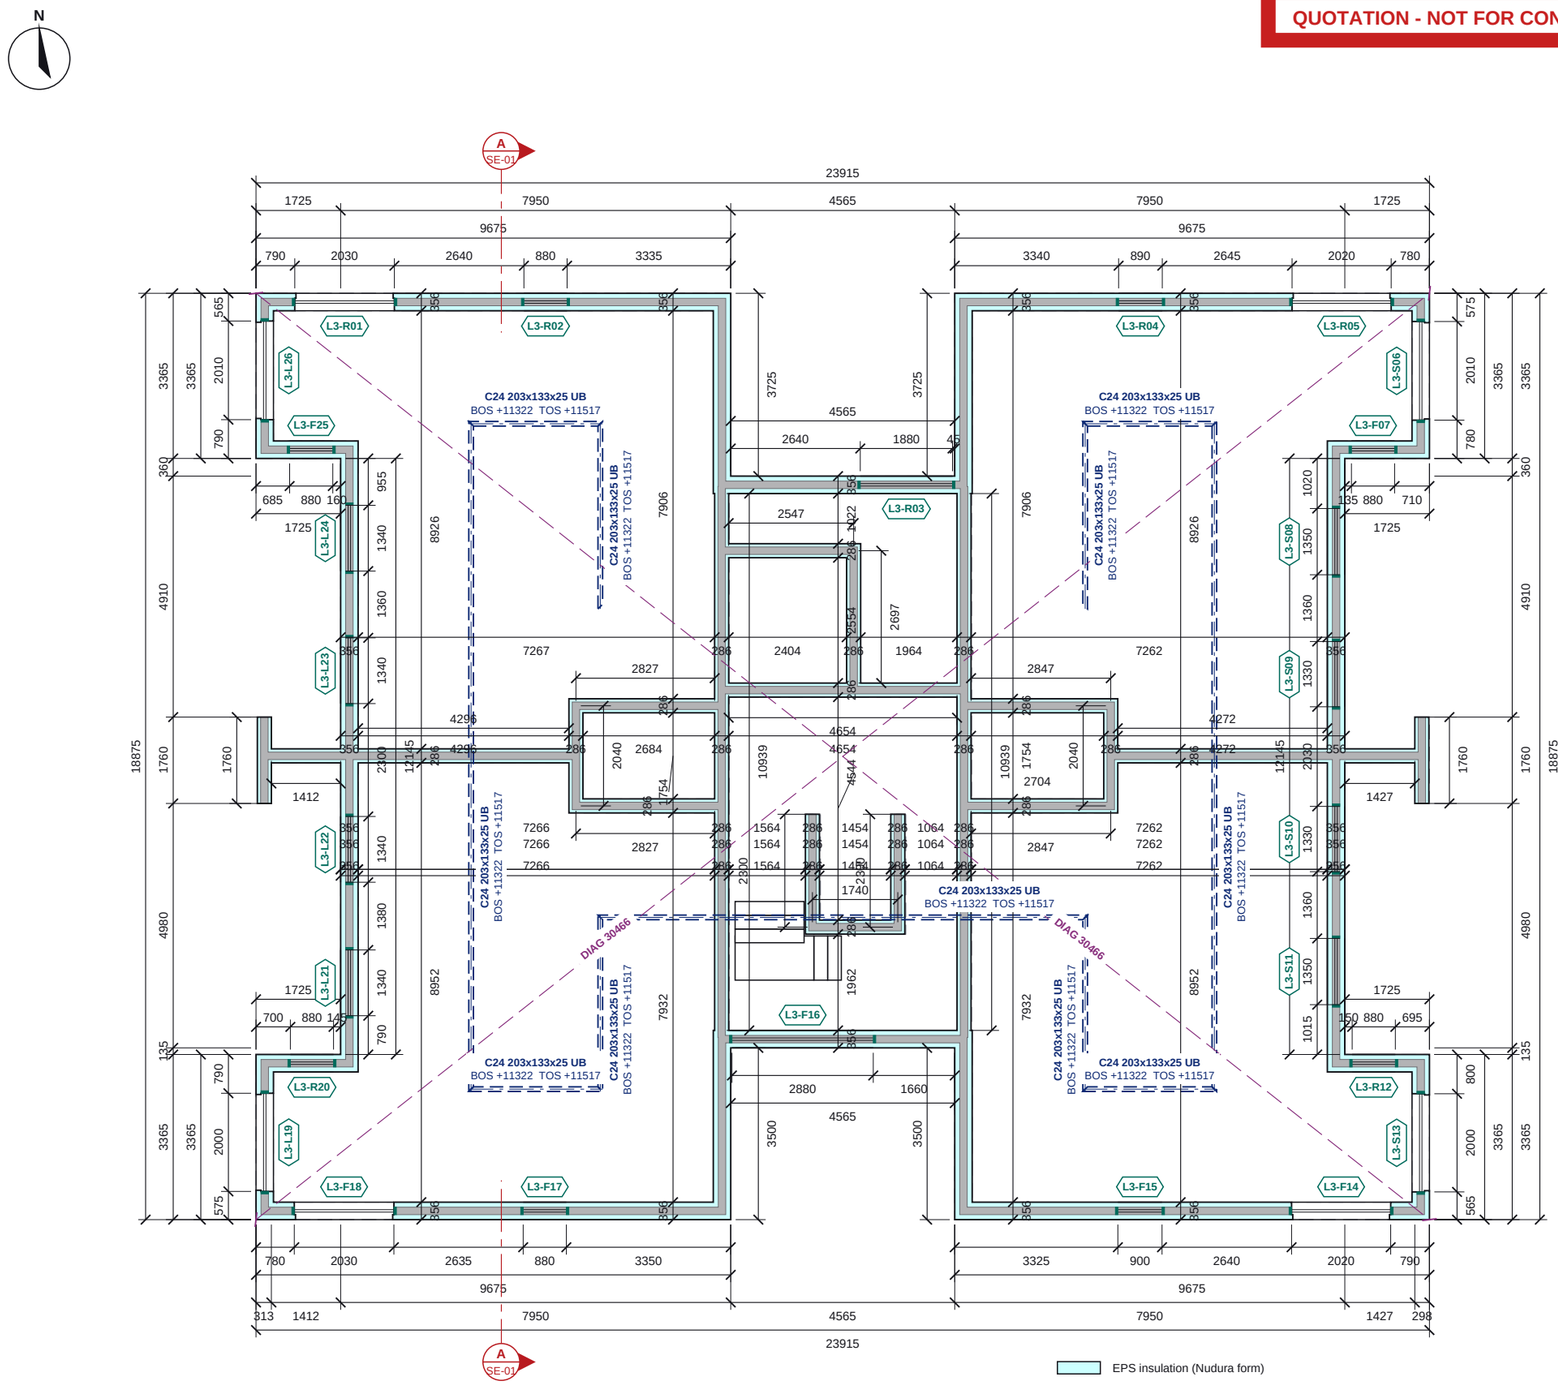

SECOND FLOOR ICF PLAN

Scale 1:125 @ A3 | Plan cut at +6086

0 1 2 3 4 5m

EPS insulation (Nudura form)
Concrete core
End cap at opening
Timber stud partition (internal, non-loadbearing)
ICF walls of the level below (dashed)
Steel over (dashed), marked
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

SECOND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L3-R01	2030	2255	+5990	+8245	-
L3-R02	880	2080	+6165	+8245	-
L3-R03	1880	1500	+6745	+8245	-
L3-R04	890	2080	+6165	+8245	-
L3-R05	2020	2255	+5990	+8245	-
L3-S06	2010	2255	+5990	+8245	-
L3-F07	880	2082	+6165	+8247	-
L3-S08	1350	1500	+6745	+8245	-
L3-S09	1330	1500	+6745	+8245	-
L3-S10	1330	1500	+6745	+8245	-
L3-S11	1350	1500	+6745	+8245	-
L3-R12	880	2082	+6165	+8247	-
L3-S13	2000	2255	+5990	+8245	-
L3-F14	2020	2255	+5990	+8245	-
L3-F15	900	2080	+6165	+8245	-
L3-F16	2880	2024	+6165	+8189	-
L3-F17	880	2080	+6165	+8245	-
L3-F18	2030	2255	+5990	+8245	-
L3-L19	2000	2255	+5990	+8245	-
L3-R20	880	2082	+6165	+8247	-
L3-L21	1340	1500	+6745	+8245	-
L3-L22	1340	1500	+6745	+8245	-
L3-L23	1340	1500	+6745	+8245	-
L3-L24	1340	1500	+6745	+8245	-
L3-F25	880	2082	+6165	+8247	-
L3-L26	2010	2255	+5990	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard compartment (party) and core / lift walls; foundation ICF 2 courses below FFL +6.080 on both blocks; FF / SF floors are the drawn 215 metal-deck composite slabs bearing into the ICF core - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 1 (12 FLATS) - SECOND FLOOR ICF

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:125	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-GA-04	Q01

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.