

SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

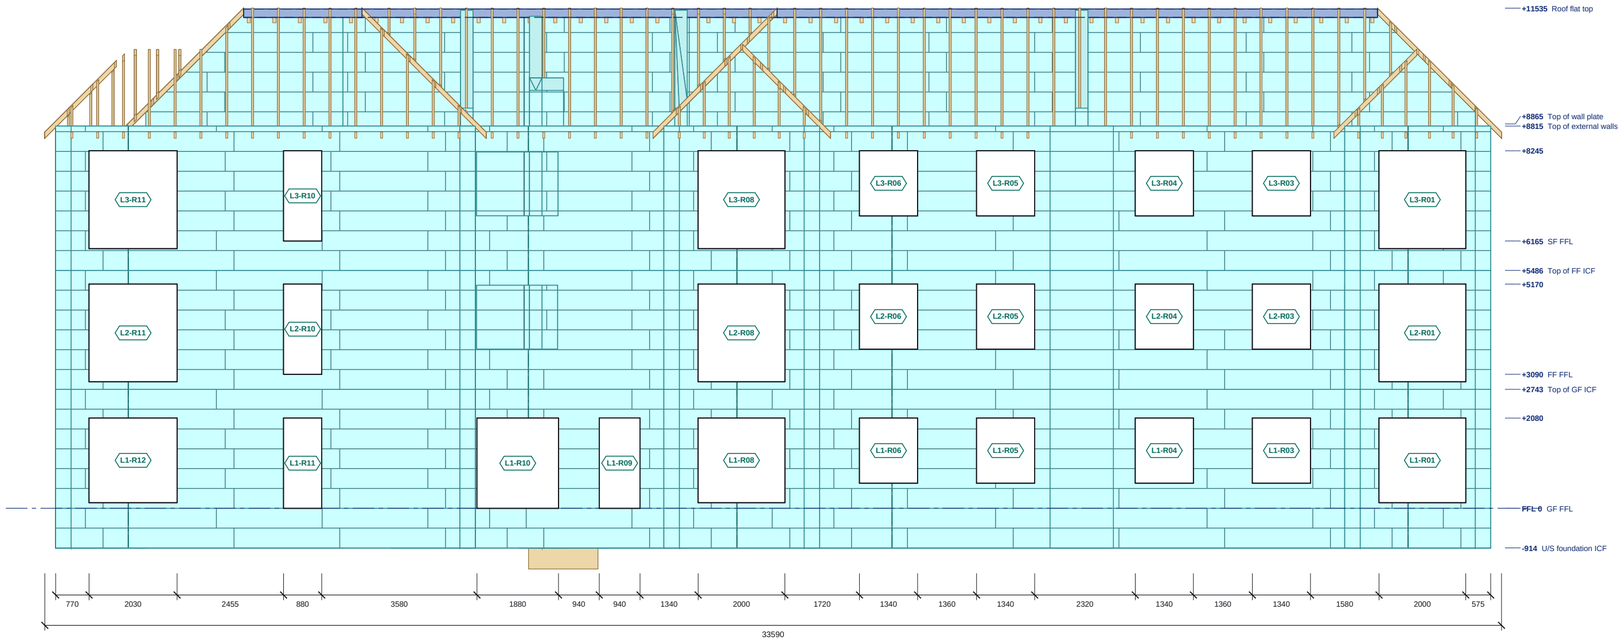

REAR ELEVATION (CAR PARK, E)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

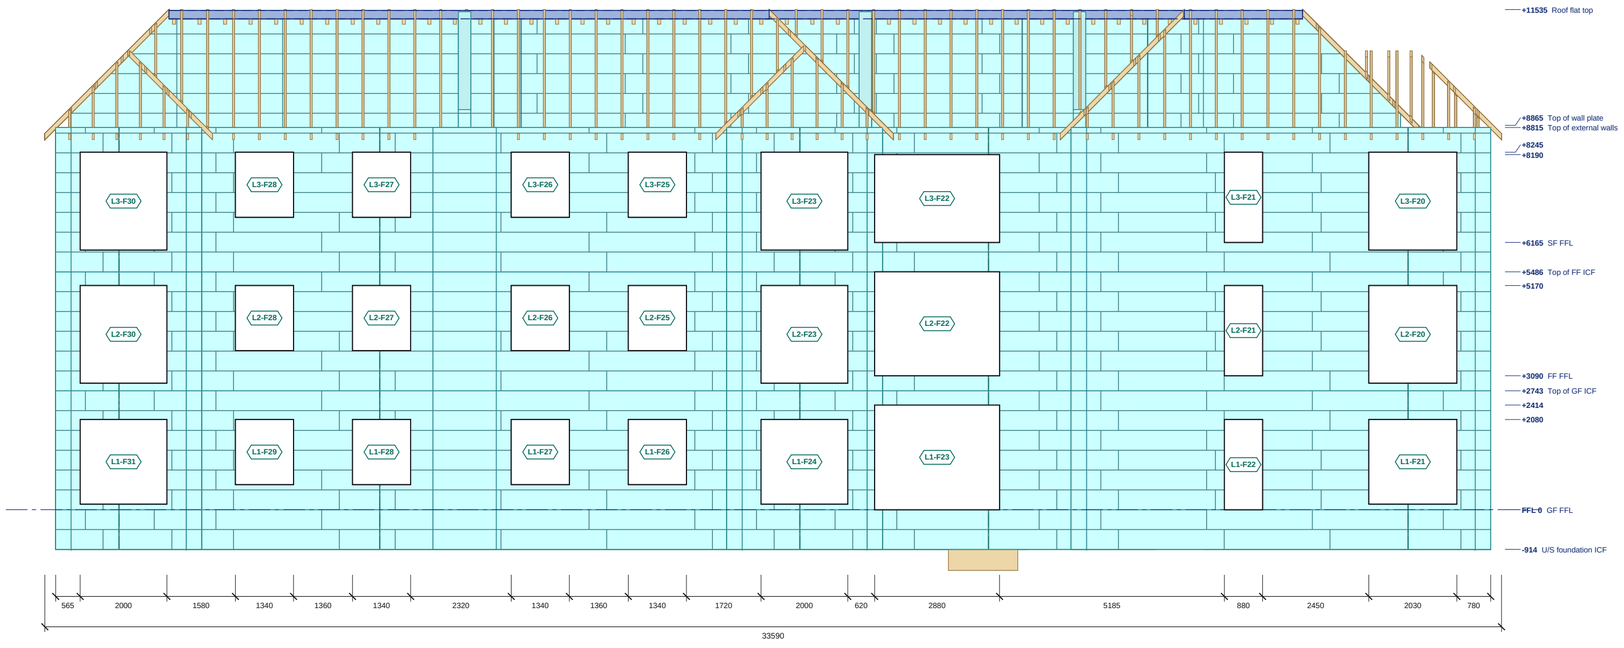

FRONT ELEVATION (ALBERT SQUARE, W)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5m

ICF external EPS face
Block course joint
Stack joint

ELEVATION SCHEDULES

REAR ELEVATION (CAR PARK, E): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-R01	2000	1950	+130	+2080	-
L1-R08	2000	1950	+130	+2080	-
L1-R11	880	2080	0	+2080	-
L1-R12	2030	1950	+130	+2080	-
L1-R03	1340	1500	+580	+2080	-
L1-R04	1340	1500	+580	+2080	-
L1-R05	1340	1500	+580	+2080	-
L1-R06	1340	1500	+580	+2080	-
L1-R09	940	2083	0	+2083	-
L1-R10	1880	2080	0	+2080	-
L2-R01	2000	2250	+2920	+5170	-
L2-R08	2000	2250	+2920	+5170	-
L2-R10	880	2080	+3090	+5170	-
L2-R11	2030	2250	+2920	+5170	-
L2-R03	1340	1500	+3670	+5170	-
L2-R04	1340	1500	+3670	+5170	-
L2-R05	1340	1500	+3670	+5170	-
L2-R06	1340	1500	+3670	+5170	-
L3-R01	2000	2255	+5990	+8245	-
L3-R08	2000	2255	+5990	+8245	-
L3-R10	880	2080	+6165	+8245	-
L3-R11	2030	2255	+5990	+8245	-
L3-R03	1340	1500	+6745	+8245	-
L3-R04	1340	1500	+6745	+8245	-
L3-R05	1340	1500	+6745	+8245	-
L3-R06	1340	1500	+6745	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT ELEVATION (ALBERT SQUARE, W): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-F24	2000	1950	+130	+2080	-
L1-F31	2000	1950	+130	+2080	-
L1-F21	2030	1950	+130	+2080	-
L1-F22	880	2080	0	+2080	-
L1-F26	1340	1500	+580	+2080	-
L1-F27	1340	1500	+580	+2080	-
L1-F28	1340	1500	+580	+2080	-
L1-F29	1340	1500	+580	+2080	-
L1-F23	2880	2414	0	+2414	-
L2-F23	2000	2250	+2920	+5170	-
L2-F30	2000	2250	+2920	+5170	-
L2-F20	2030	2250	+2920	+5170	-
L2-F21	880	2080	+3090	+5170	-
L2-F25	1340	1500	+3670	+5170	-
L2-F26	1340	1500	+3670	+5170	-
L2-F27	1340	1500	+3670	+5170	-
L2-F28	1340	1500	+3670	+5170	-
L2-F22	2880	2396	+3090	+5486	-
L3-F23	2000	2255	+5990	+8245	-
L3-F30	2000	2255	+5990	+8245	-
L3-F20	2030	2255	+5990	+8245	-
L3-F21	880	2080	+6165	+8245	-
L3-F25	1340	1500	+6745	+8245	-
L3-F26	1340	1500	+6745	+8245	-
L3-F27	1340	1500	+6745	+8245	-
L3-F28	1340	1500	+6745	+8245	-
L3-F22	2880	2024	+6165	+8189	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
top of ICF	+2414
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8190
top of ICF	+8245
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-071-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - FRONT AND REAR ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-EL-03	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.