

SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

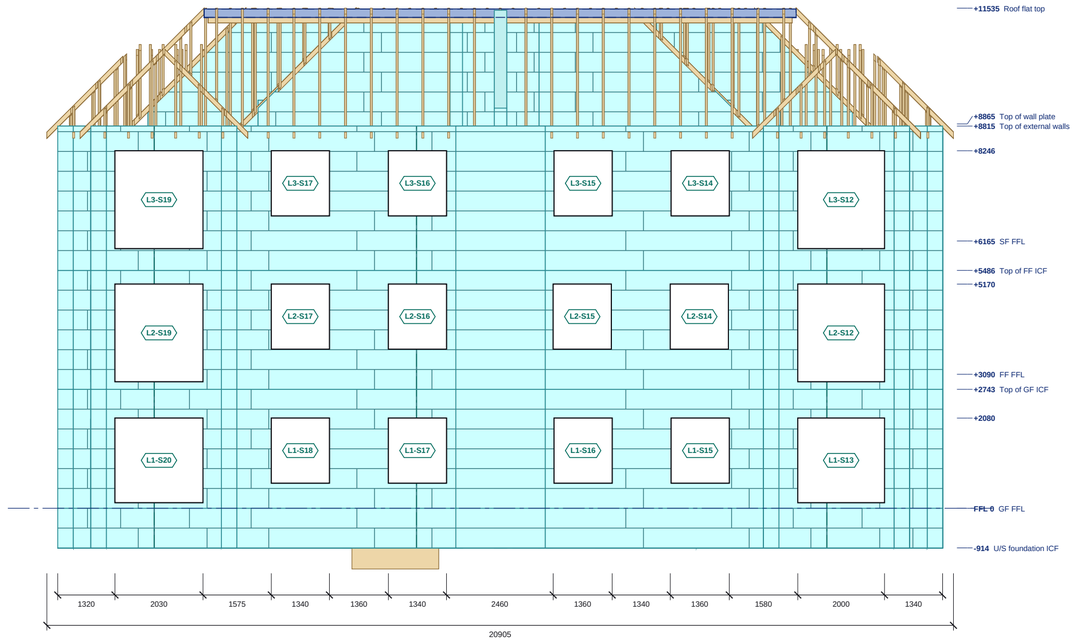

SIDE ELEVATION (QUEENS PIER ROAD, S)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

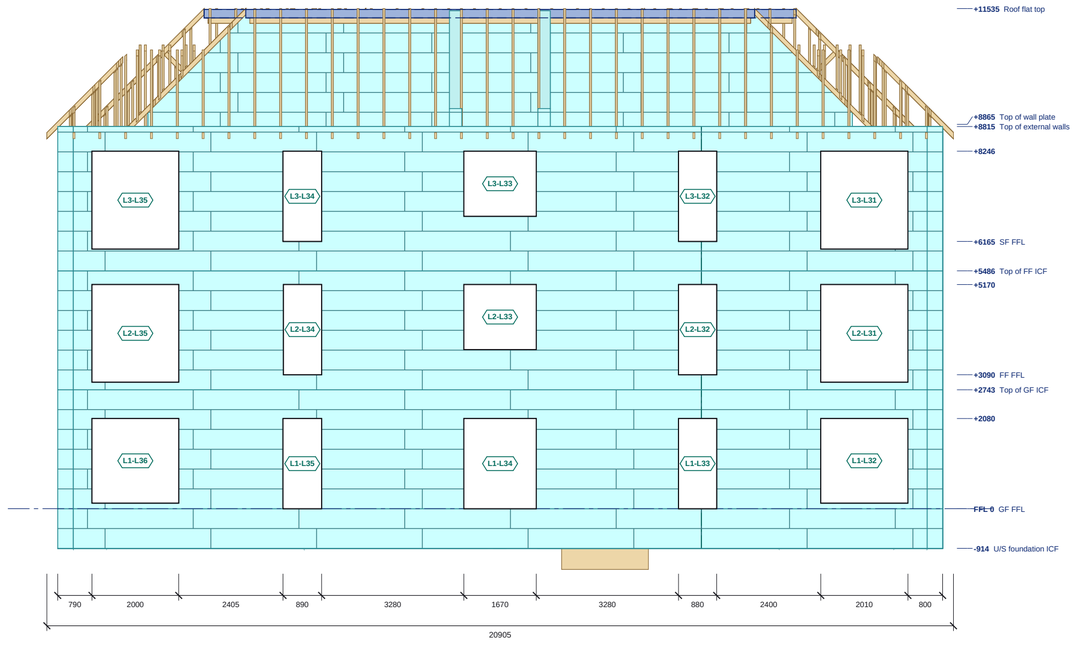

SIDE ELEVATION (ALBERT ROAD, N)

Scale 1:100 @ A2 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

SIDE ELEVATION (QUEENS PIER ROAD, S): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-S13	2000	1950	+130	+2080	-
L1-S20	2030	1950	+130	+2080	-
L1-S15	1340	1500	+580	+2080	-
L1-S16	1340	1500	+580	+2080	-
L1-S17	1340	1500	+580	+2080	-
L1-S18	1340	1500	+580	+2080	-
L2-S12	2000	2250	+2920	+5170	-
L2-S19	2030	2250	+2920	+5170	-
L2-S14	1340	1500	+3670	+5170	-
L2-S15	1340	1500	+3670	+5170	-
L2-S16	1340	1500	+3670	+5170	-
L2-S17	1340	1500	+3670	+5170	-
L3-S12	2000	2255	+5990	+8245	-
L3-S19	2030	2255	+5990	+8245	-
L3-S14	1340	1500	+6745	+8245	-
L3-S15	1340	1500	+6745	+8245	-
L3-S16	1340	1500	+6745	+8245	-
L3-S17	1340	1500	+6745	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

SIDE ELEVATION (ALBERT ROAD, N): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-L32	2010	1950	+130	+2080	-
L1-L33	880	2080	0	+2080	-
L1-L34	1670	2080	0	+2080	-
L1-L35	890	2080	0	+2080	-
L1-L36	2000	1950	+130	+2080	-
L2-L31	2010	2250	+2920	+5170	-
L2-L32	880	2080	+3090	+5170	-
L2-L33	1670	1500	+3670	+5170	-
L2-L34	880	2080	+3090	+5170	-
L2-L35	2000	2250	+2920	+5170	-
L3-L31	2010	2255	+5990	+8245	-
L3-L32	880	2080	+6165	+8245	-
L3-L33	1670	1500	+6745	+8245	-
L3-L34	890	2080	+6165	+8245	-
L3-L35	2000	2255	+5990	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

SIDE ELEVATION (QUEENS PIER ROAD, S): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

SIDE ELEVATION (ALBERT ROAD, N): LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2080
Top of GF ICF	+2743
FF FFL	+3090
top of ICF	+5170
Top of FF ICF	+5486
SF FFL	+6165
top of ICF	+8246
Top of external walls	+8815
Top of wall plate	+8865
Roof flat top	+11535

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-071-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - SIDE ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-EL-04	Q01