
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

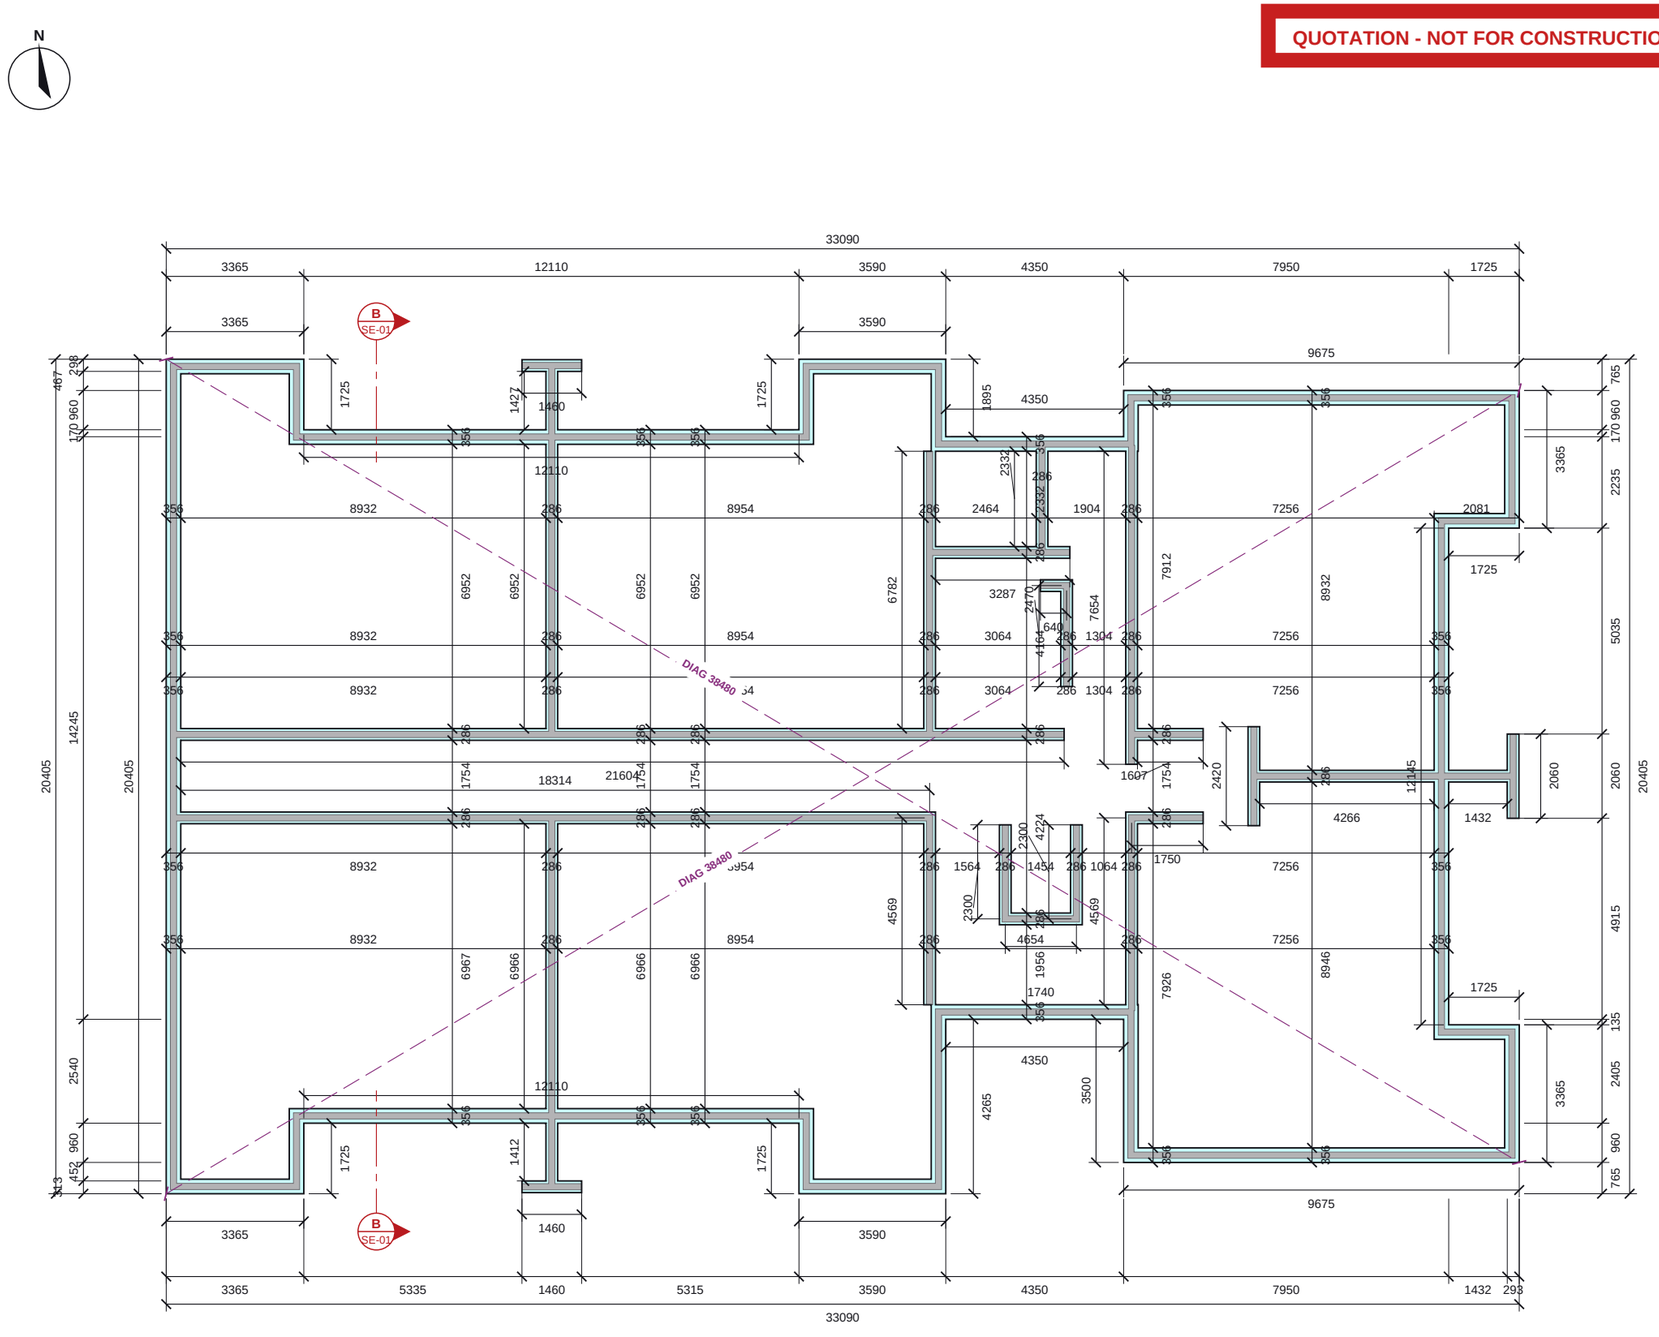

FOOTING ICF PLAN

Scale 1:150 @ A3 | Plan cut at -457

0 1 2 3 4 5 6 7 8m

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOOTING ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard compartment (party) and core / lift walls; foundation ICF 2 courses below FFL +6.080 on both blocks; FF / SF floors are the drawn 215 metal-deck composite slabs bearing into the ICF core - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - FOUNDATION ICF

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:150	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-GA-05	Q01