
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

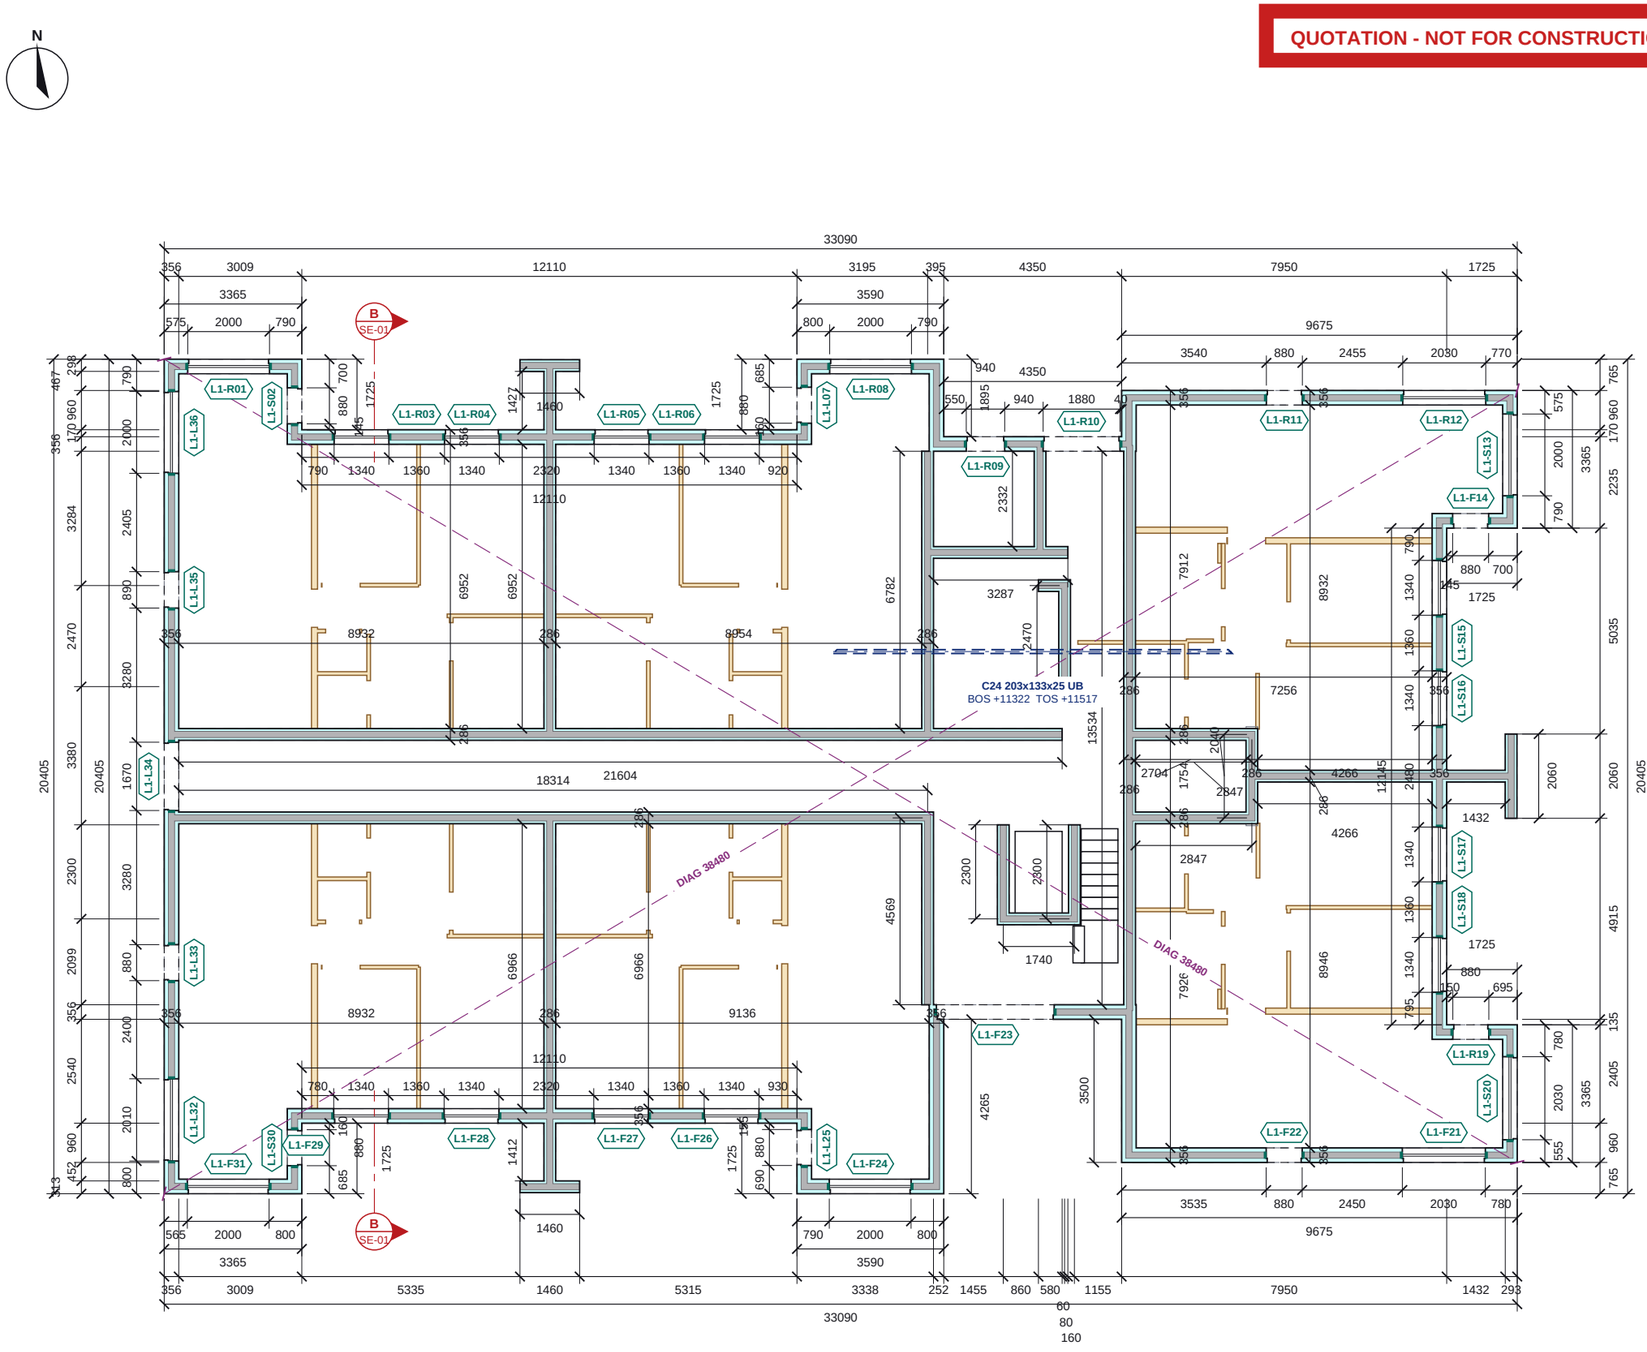

GROUND FLOOR ICF PLAN

Scale 1:150 @ A3 | Plan cut at +1480

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.

GROUND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-R01	2000	1950	+130	+2080	-
L1-S02	880	2084	0	+2084	-
L1-R03	1340	1500	+580	+2080	-
L1-R04	1340	1500	+580	+2080	-
L1-R05	1340	1500	+580	+2080	-
L1-R06	1340	1500	+580	+2080	-
L1-L07	880	2084	0	+2084	-
L1-R08	2000	1950	+130	+2080	-
L1-R09	940	2083	0	+2083	-
L1-R10	1880	2080	0	+2080	-
L1-R11	880	2080	0	+2080	-
L1-R12	2030	1950	+130	+2080	-
L1-S13	2000	1950	+130	+2080	-
L1-F14	880	2084	0	+2084	-
L1-S15	1340	1500	+580	+2080	-
L1-S16	1340	1500	+580	+2080	-
L1-S17	1340	1500	+580	+2080	-
L1-S18	1340	1500	+580	+2080	-
L1-R19	880	2084	0	+2084	-
L1-S20	2030	1950	+130	+2080	-
L1-F21	2030	1950	+130	+2080	-
L1-F22	880	2080	0	+2080	-
L1-F23	2880	2414	0	+2414	-
L1-F24	2000	1950	+130	+2080	-
L1-L25	880	2084	0	+2084	-
L1-F26	1340	1500	+580	+2080	-
L1-F27	1340	1500	+580	+2080	-
L1-F28	1340	1500	+580	+2080	-
L1-F29	1340	1500	+580	+2080	-
L1-S30	880	2084	0	+2084	-
L1-F31	2000	1950	+130	+2080	-
L1-L32	2010	1950	+130	+2080	-
L1-L33	880	2080	0	+2080	-
L1-L34	1670	2080	0	+2080	-
L1-L35	890	2080	0	+2080	-
L1-L36	2000	1950	+130	+2080	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
C24	203x133x25 UB S355	+11322	+11517

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard compartment (party) and core / lift walls; foundation ICF 2 courses below FFL +6.080 on both blocks; FF / SF floors are the drawn 215 metal-deck composite slabs bearing into the ICF core - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - GROUND FLOOR ICF

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:150	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-GA-06	Q01