
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

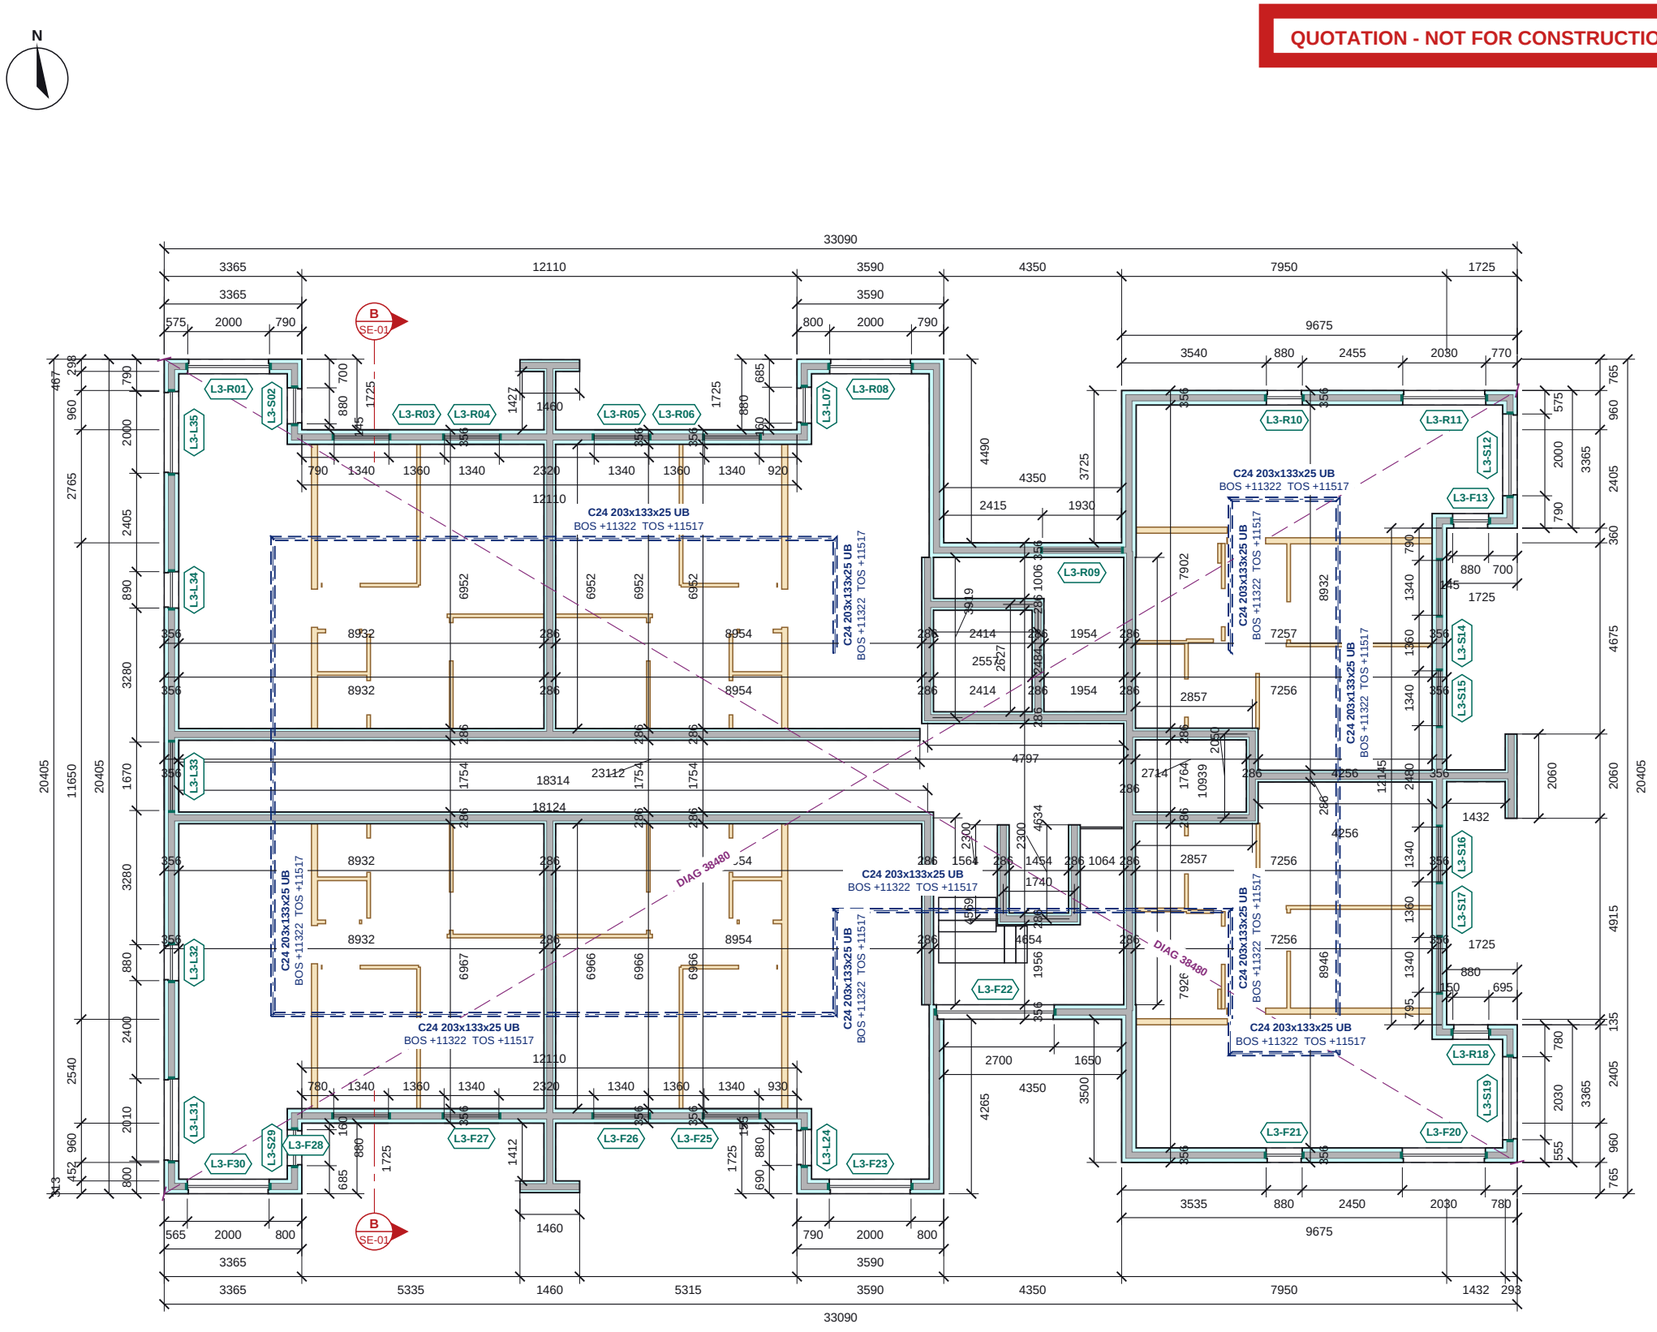

EPS insulation (Nudura form)
Concrete core
End cap at opening
Timber stud partition (internal, non-loadbearing)
ICF walls of the level below (dashed)
Steel over (dashed), marked
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

SECOND FLOOR ICF PLAN

Scale 1:150 @ A3 | Plan cut at +6686

0 1 2 3 4 5 6 7 8m

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.

SECOND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L3-R01	2000	2255	+5990	+8245	-
L3-S02	880	2084	+6165	+8249	-
L3-R03	1340	1500	+6745	+8245	-
L3-R04	1340	1500	+6745	+8245	-
L3-R05	1340	1500	+6745	+8245	-
L3-R06	1340	1500	+6745	+8245	-
L3-L07	880	2084	+6165	+8249	-
L3-R08	2000	2255	+5990	+8245	-
L3-R09	1930	1500	+6745	+8245	-
L3-R10	880	2080	+6165	+8245	-
L3-R11	2030	2255	+5990	+8245	-
L3-S12	2000	2255	+5990	+8245	-
L3-F13	880	2084	+6165	+8249	-
L3-S14	1340	1500	+6745	+8245	-
L3-S15	1340	1500	+6745	+8245	-
L3-S16	1340	1500	+6745	+8245	-
L3-S17	1340	1500	+6745	+8245	-
L3-R18	880	2084	+6165	+8249	-
L3-S19	2030	2255	+5990	+8245	-
L3-F20	2030	2255	+5990	+8245	-
L3-F21	880	2080	+6165	+8245	-
L3-F22	2880	2024	+6165	+8189	-
L3-F23	2000	2255	+5990	+8245	-
L3-L24	880	2084	+6165	+8249	-
L3-F25	1340	1500	+6745	+8245	-
L3-F26	1340	1500	+6745	+8245	-
L3-F27	1340	1500	+6745	+8245	-
L3-F28	1340	1500	+6745	+8245	-
L3-S29	880	2084	+6165	+8249	-
L3-F30	2000	2255	+5990	+8245	-
L3-L31	2010	2255	+5990	+8245	-
L3-L32	880	2080	+6165	+8245	-
L3-L33	1670	1500	+6745	+8245	-
L3-L34	890	2080	+6165	+8245	-
L3-L35	2000	2255	+5990	+8245	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8; 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation models: 6in XR35 external walls, 6in Standard compartment (party) and core / lift walls; foundation ICF 2 courses below FFL +6.080 on both blocks; FF / SF floors are the drawn 215 metal-deck composite slabs bearing into the ICF core - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - SECOND FLOOR ICF

ICF walls, openings, lintels, steel over and engineer's notes - sheet 1 of 2 (schedules on sheet 2)

SCALE	SIZE	DATE
1:150	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-GA-08	Q01

SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517
C24	203x133x25 UB S355	+11322	+11517

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

SECOND FLOOR ICF SCHEDULES

See sheet 1 of 2 for the plan.

NOTES

1. Schedules of Second Floor ICF General Arrangement (sheet 1 of 2). Openings: structural openings in the ICF, sill and head above GF FFL.
2. Steel: BOS / TOS = bottom / top of steel above GF FFL; marks and sections from the engineer where matched.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - SECOND FLOOR ICF

Second Floor ICF schedules - sheet 2 of 2

SCALE	SIZE	DATE
NTS	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-GA-08	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.