
SUPPLY SCOPE (distributor quantities issue, no prices): we supply the pre-cut Nudura ICF forms only; the stock forms, accessories and alignment system are supplied by the distributor. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

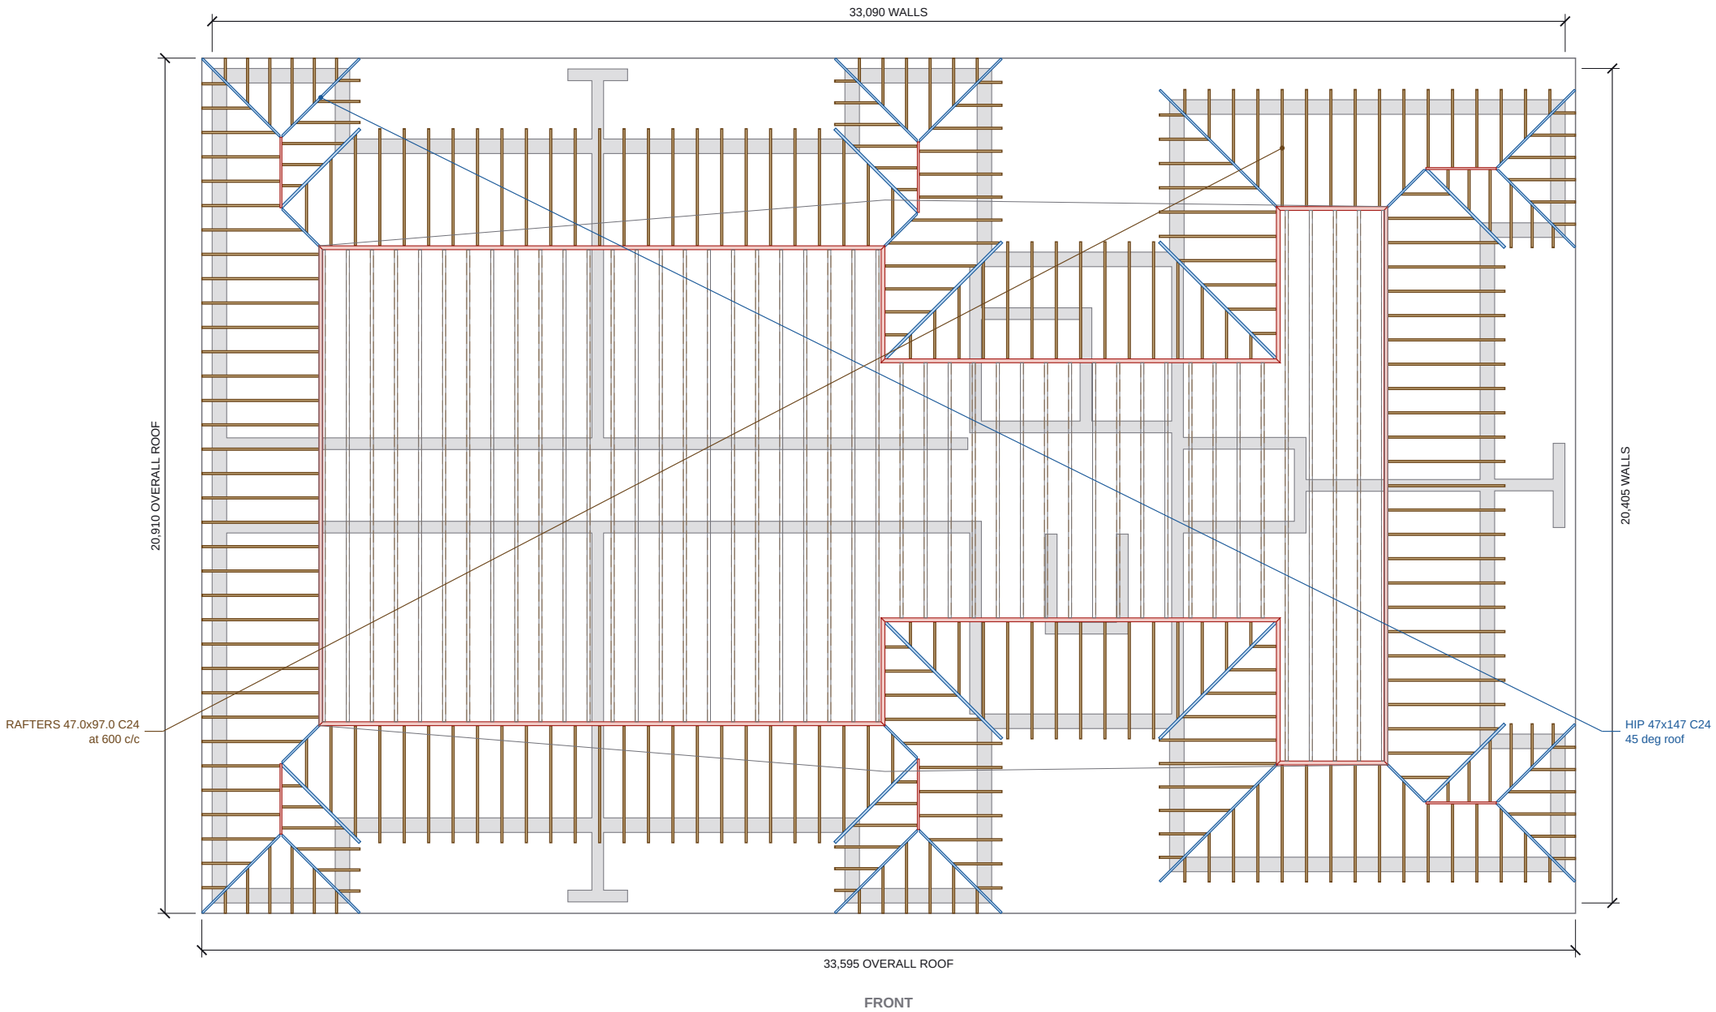

Rafter / jack rafter
Ceiling joist
ICF walls (outline)
Hip / valley
Prop / strut / binder
Flat-top joist
Wall / crown plate
0 1 2 3 4 5m

ROOF STRUCTURE PLAN

Scale 1:150 @ A3 | Plan on the roof structure, slates / battens / membrane omitted; block plan as drawn (front at the bottom)

ROOF STRUCTURE SCHEDULES

ROOF TIMBER (AS MODELLED)

Item	Section	Length	Qty	Run m
Ceiling joist	75x295 C24	6,239-13,464	45	444.2
Common rafter	47.0x97.0 C24	2,733-4,047	123	475.1
Cripple rafter	47.0x97.0 C24	834-3,910	51	123.1
Firring	75x115-271 firring	6,239	16	99.8
Firring	75x27-364 firring	13,464	5	67.3
Firring	75x51-340 firring	11,544	24	277.1
Hip	47x147 C24	1,414-4,956	20	60.1
Jack rafter (hip)	47.0x97.0 C24	768-3,497	94	170.4
Jack rafter (valley)	47.0x97.0 C24	768-2,291	18	27.2
Osb	18 OSB3 deck	0	1	0.0
Ridge beam	2/47x195 C24	2,540-13,842	12	90.2
Ridge board	47x122 C24	1,725	6	10.3
Valley	63x147 C24	3,347-4,956	10	40.3

Length = member length (mm), a range where the members vary (jacks, hips). For pricing only.

NOTES

1. Roof as modelled for the quotation (BuildEase roof framer): 45 deg hipped roof with a FLAT TOP over the whole H-plan, drawn as a CUT roof (425 members: rafters, hips, valleys, jack rafters, crown plate, flat-top joists, ceiling joists) at 600 centres. The drawing (06-001A) shows a TRUSSED roof with a flat top: the truss manufacturer designs the girder / flat-top / jack truss set; this layout gives the extent and the loose-timber equivalent for pricing only.
2. Plate: 50 deep timber wall plate bedded on the ICF core, plate top +8,865 above GF FFL (+6.080 AOD); external walls flat at +8,815. Flat top +11,535 (PV + counter-balanced handrail by others), crown 2,670 in from the wall line. Overhang 250. Natural / imitation slate.
3. Compartment (party) walls carried up to 50 below the top of the rafters (fire stop by others). Ramsey, Isle of Man, coastal: snow zone 1, vb 26 m/s, exposed (assumed - engineer / truss supplier to confirm).
4. Roof framer notes (to resolve in the supplier's design): Flat-top (crown) roof: drawn here as a CUT roof - for trussed rafters lay them out in Manual design (Truss run: Flat-top / Mono, Girder truss) for the truss supplier; joists: no solid C24 joist spans 13464 mm - add a beam / wall under, or use I-joists / steel (Manual design); 20 hip(s): where hips meet the ridge (or each other) the apex needs a prop to a binder / beam, as in any cut hipped roof - add it in Manual design (Prop, Beam); the drawn check marks each one; flat-top: the crown plate carries the rafter heads round the ring - support it at the hip heads (props to a binder / steel posts) or make it a steel ring (engineer); the crown joists tie it.
5. Sections and member profiles on ES26-071-RF-04. All levels above GF FFL. Dimensions in mm.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Ian Piercy (Distributor) for Ramsey Town Commissioners	Close Woirrey / Albert Road, Ramsey, Isle of Man

DRAWING TITLE

BLOCK 2 (18 FLATS) - ROOF STRUCTURE LAYOUT

Hipped roof with flat top: rafters, hips, valleys, crown, flat-top joists, plates

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-071-RF-03	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.